



END VIEW / DIMENSIONS



LENS / OPTICS APPEARANCE

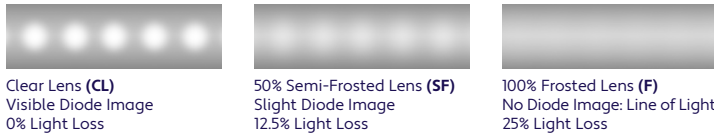

GENERAL FEATURES

Applications	Direct View, Accent, Decorative, Surface Lighting
Lens	Clear, 50% Semi-Frosted, or 100% Frosted
Viewing Angle	120°
Length	Built to Order (+/- 1/8" Tolerance)
Construction	Aluminum Extrusion
Field Cutting	Dry and Damp Location Field Cuttable
Weight	0.81 lbs per Foot
Mounting	Mounting Clips (Sold Separately)
Listing	Dry or Damp Location UL2108, 67.1.9, 60.4, CSA C22.2 #9 UL8750, CSA250
Driver	Remote (Sold Separately)
Closet Rating	Up to 3.6 Watts per Foot Maximum
Temperature Ratings	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
Installation Link	

ELECTRICAL

Dimming	0-10V, Forward / Reverse Phase, Lutron, DMX, DALI
Maximum Run (Class 1 Applications)	30' (8W), 36' (6W, 4W)
Maximum Run (Class 2 Applications)	10' (8W), 14' (6W), 21' (4W)
Luminaire Voltage	24VDC

SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS

Series	Lens	Watts per Foot*2	Dimming	CCT LED	Listing	Finish	Luminaire Length
A1-ZAKY-SWD							
ZAKY Side Wall Duo (A1-ZAKY-SWD)	Clear Lens (CL)	2 + 2 Watts (4W) 432 Lumens / ft*1	0-10V: 100% - 1% (10V) Phase Dimming: Forward Phase / Reverse Phase (PH)	2400K (24K) 2700K (27K) 3000K (30K)	Indoor (DRY)	Natural Silver* (NA) Polished (PA)	Specify Length in Feet & Inches Example: 7'8"
	50% Semi-Frosted Lens (SF)	3 + 3 Watts (6W) 648 Lumens / ft*1	Hi-Lume 1% 3 Wire*2 (L3DA)	3500K (35K)	Outdoor (DAMP)	White (WH) Satin / Silver (SA)	
	100% Frosted Lens: Line of Light (F)	4 + 4 Watts (8W) 864 Lumens / ft*1	Hi-Lume Premier 0.1% JA8*3 (L3D0) DMX-512*4 (DMX)	4000K (40K) 4500K (45K)		Black (BK)	
			DALI*5 (DALI)	5000K (50K)			
			JA8 0-10V (JA8-10V)	5700K (57K)			
			Leave Blank for Non-Dimming	Red (R) Green (G) Blue (B) Amber (A)			

Note: Remote drivers wattage sized based on length of run. Example: 10' run x 4 Watts per foot = 40 Watts. Driver will be sized to 40 Watts maximum.

- *1 Lumens per Foot based on 35K CCT LED with Clear Lens (CL). Example: 108 Lumens x 4 Watts = 432 Lumens per Foot.
- *2 (L3DA) 40 watt max Hi-Lume 1% L3DA3W #L3DA4UIUKL-CV240
- *3 (L3D0) 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U
- *4 Default DMX address of each fixture is 001. Consult third party DMX commissioner to modify at time of installation.
- *5 DALI commissioning to be performed by a third party at time of installation. ALUZ does not provide DALI commissioning.
- *6 Standard Finish is Natural Silver (NA) if left blank.



LAMP FEATURES


Lamp Type	LEDs
CRI	> 90
Efficacy (Based on 35K CCT LED)	108 Lumens per Watt

LAMP SPECIFICATIONS


Lamp Number	Correlated Color Temperature / Description	Efficacy (Lumens per Watt)	L70 LED Life
24K	2400 Kelvin (Incandescent White)	108	60,000 hrs.
27K	2700 Kelvin (Warm White)	108	
30K	3000 Kelvin (Warm White)	108	
35K	3500 Kelvin (Neutral White)	108	
40K	4000 Kelvin (Neutral White)	108	
45K	4500 Kelvin (Neutral White)	108	40,000 hrs.
50K	5000 Kelvin (Cool White)	108	
57K	5700 Kelvin (Cool White)	108	
R	Red (621nm)		
G	Green (525nm)		
B	Blue (470nm)		
A	Amber (590nm)		

To calculate Lumens per Foot, multiply Efficacy by Watts per Foot.
Example: 108 Lumens per Watt x 2 Watts per Foot = 216 Lumens per Foot.

BEAM ANGLE



SPECTRAL POWER DISTRIBUTION AMBER LED (590nm) TURTLE FRIENDLY

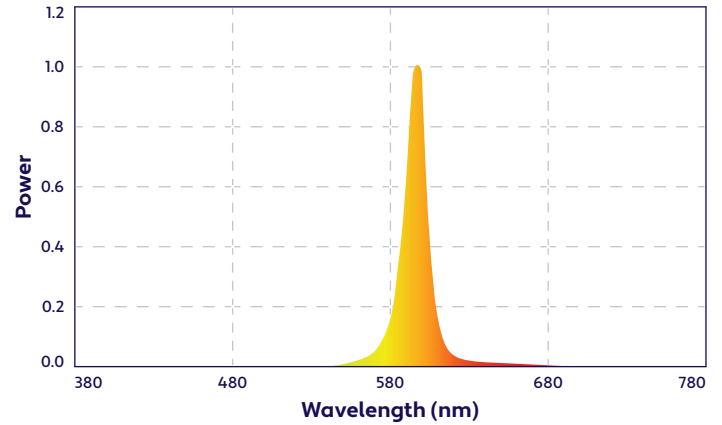


DRIVERS

Dimming Selection	Product Code	Link to Specification Sheet / URL
Phase Dimming: Forward Phase / Reverse Phase	(PH)	
0-10V: 100% - 1%	(10V)	
Hi-Lume 1% 3 Wire	(L3DA)	
Hi-Lume Premier 0.1% JA8	(L3D0)	
JA8 0-10V	(JA8-10V)	
DMX-512	(DMX)	
DALI	(DALI)	

MOUNTING OPTIONS (Sold Separately)

Note: Mounting clips are only available in Natural Silver Finish, unless otherwise specified.

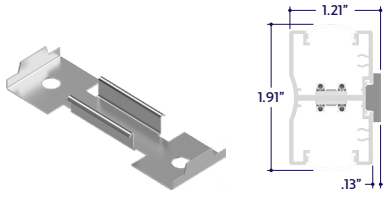

Part #	Qty.
A1-ZAKY-SWD-MC	

Note: Use 1 mounting clip per 2', rounded up.
Click on image to see cut sheet for additional details.

END CAP (Sold Separately)




End Cap
(A1-ZAKY-SWD-EC)

Part #	Qty.
A1-ZAKY-SWD-EC	

Note: Use 1 End Cap for each termination.

DRY CONNECTORS (Sold Separately)


Note: Connectors are factory assembled to each run length. Connectors are subject to change without notice.

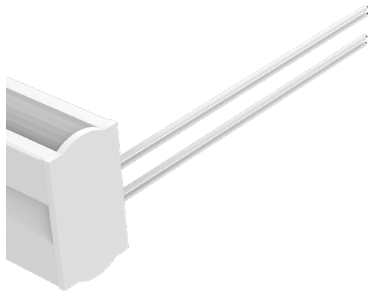

Dry Power Connector
(A1-ZAKY-SWD-PC-BFF-DRY-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZAKY-SWD-PC-BFF-DRY-	36"	
A1-ZAKY-SWD-PC-BFF-DRY-		


Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

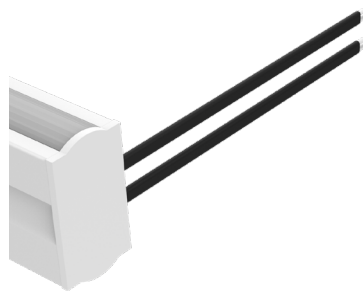

Dry Power Connector with Black Jacket
(A1-ZAKY-SWD-PC-BFF-DRY-BK-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZAKY-SWD-PC-BFF-DRY-BK-	36"	
A1-ZAKY-SWD-PC-BFF-DRY-BK-		


Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

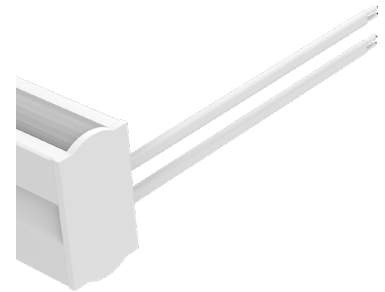

Dry Power Connector with White Jacket
(A1-ZAKY-SWD-PC-BFF-DRY-WH-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZAKY-SWD-PC-BFF-DRY-WH-	36"	
A1-ZAKY-SWD-PC-BFF-DRY-WH-		


Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

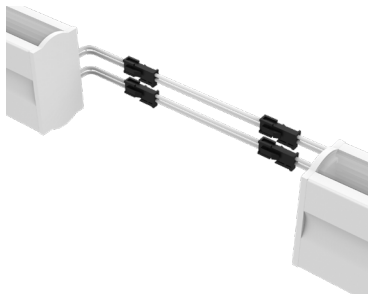

Dry Continuous Connector
(A1-ZAKY-SWD-CC-BFF-DRY-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZAKY-SWD-CC-BFF-DRY-	3"	
A1-ZAKY-SWD-CC-BFF-DRY-		


Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

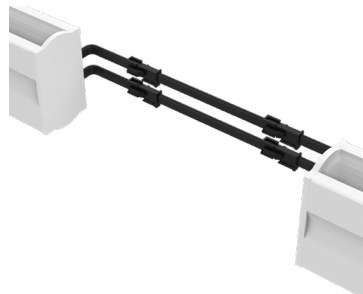

Dry Continuous Connector with Black Jacket
(A1-ZAKY-SWD-CC-BFF-DRY-BK-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZAKY-SWD-CC-BFF-DRY-BK-	3"	
A1-ZAKY-SWD-CC-BFF-DRY-BK-		

Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

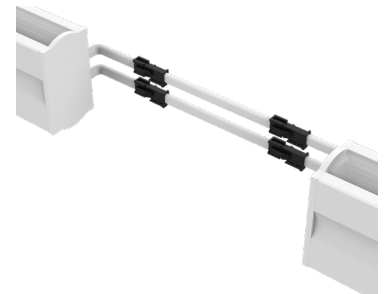


Dry Continuous Connector with White Jacket
(A1-ZAKY-SWD-CC-BFF-DRY-WH-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZAKY-SWD-CC-BFF-DRY-WH-	3"	
A1-ZAKY-SWD-CC-BFF-DRY-WH-		


Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

DESIGN GUIDELINES


Individual Fixture



Continuous Run (Dry or Wet Location)

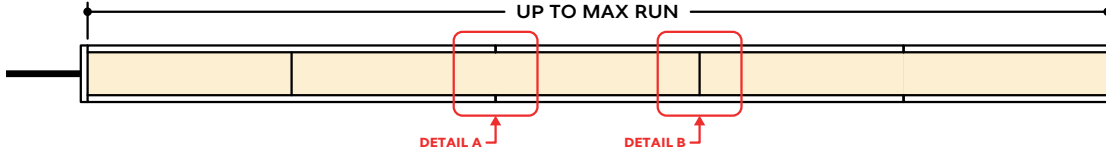

Runs with Continuous Connector (Dry Location)

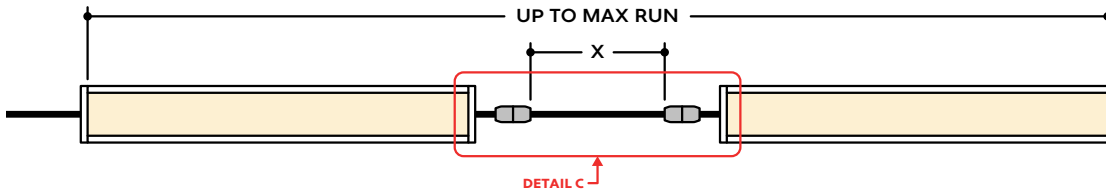


KEY

- Detail A Two Extrusions Meet:** Two extrusion segments meet, held together by a mounting clip. Refer to installation instructions for additional details.
- Detail B Two Lenses Meet:** Lenses are staggered so that the lens always overlaps where two extrusion segments meet. Refer to installation instructions for additional details.
- Detail C Dry Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a dry location installation area.

Note: Drawings not to scale. Product may differ from examples shown.

CONNECTION SEQUENCE

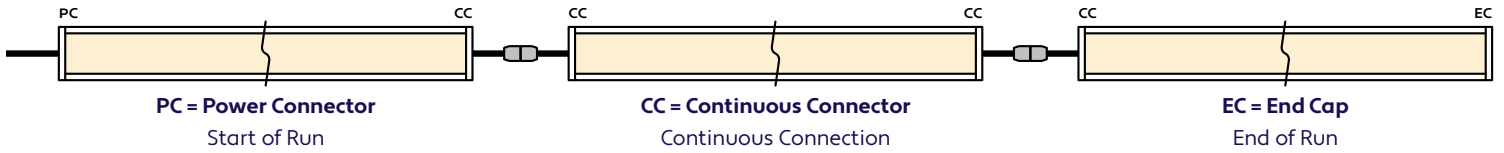


- Specifying a layout is not required to place an order.
- Configuration code applies to full length ordered and will be built per the Continuous Run models on Design Guidelines.
- Connector type subject to change based on availability and listing. Refer to Design Guidelines for details.

HOW TO SPECIFY CONFIGURATIONS


Example: 20' Straight Run

- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-20'-PC-EC




Example: 25' L-Shaped Run

- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-12'-PC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-6'-CC-EC

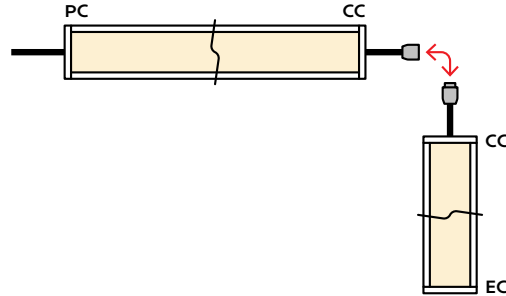

Example: 30' U-Shaped Run

- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-6'-PC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-18'-CC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-6'-CC-EC

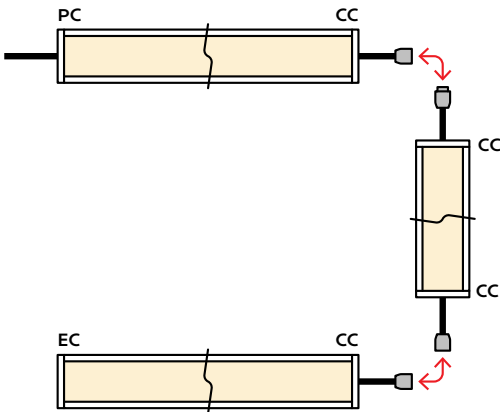

Example: 28' Rectangle Shaped Run

- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-11'-PC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-3'-CC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-11'-CC-CC
- 1x A1-ZAKY-SWD-CL-4W-10V-35K-DRY-NA-3'-CC-EC

