


### END VIEWS / DIMENSIONS



### GENERAL FEATURES

<b>Applications</b>	Mud-In, Accent, Decorative, Surface, Recessed Lighting
<b>Lens</b>	50% Semi-Frosted or 100% Frosted
<b>Viewing Angle</b>	120°
<b>Length</b>	Built to Order (Shipped in assembled 8' segments)
<b>Construction</b>	Aluminum Extrusion
<b>Field Cutting</b>	Dry and Damp Location Field Cuttable
<b>Weight</b>	0.81 lbs per foot
<b>Mounting</b>	Mud-In
<b>Listing</b>	Dry, Damp, or Wet Location UL2108, 67.1.9, 60.4, CSA C22.2 #9 UL8750, CSA250
<b>Driver</b>	Remote (Sold Separately)
<b>Closet Rating</b>	Up to 3.6 Watts per Foot Maximum
<b>Temperature Ratings</b>	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
<b>Installation Link</b>	

### ELECTRICAL

<b>Dimming</b>	0-10V, Forward / Reverse Phase, Lutron, DMX, DALI
<b>Maximum Run (Class 1 Applications)</b>	20' (6W), 30' (4W), 36' (3W, 2W)
<b>Maximum Run (Class 2 Applications)</b>	14' (6W), 21' (4W), 28' (3W), 36' (2W)
<b>Luminaire Voltage</b>	24VDC

### SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS

Series	Lens	Watts per Foot	Dimming	CCT LED	Listing	Finish	Luminaire Length
<b>A2-ZUVU-FWL</b>						<b>WH</b>	
ZUVU Flush Wall (A2-ZUVU-FWL)	50% Semi-Frosted Lens (SF)	2 Watts (2W) 216 Lumens / ft <sup>1</sup>	0-10V: 100% - 1% (10V) Phase Dimming: Forward Phase / Reverse Phase (PH)	2400K (24K) 2700K (27K) 3000K (30K) 3500K (35K)	Indoor (DRY) Outdoor (DAMP)	White (WH)	Specify Length in Feet & Inches Example: 7'8"
	100% Frosted Lens: Line of Light (F)	3 Watts (3W) 324 Lumens / ft <sup>1</sup>	Hi-Lume 1% 3 Wire <sup>2</sup> (L3DA)	4000K (40K) 4500K (45K)	Outdoor <sup>4</sup> (WET)		
		4 Watts (4W) 432 Lumens / ft <sup>1</sup>	Hi-Lume Premier 0.1% JA8 <sup>3</sup> (L3D0)	5000K (50K) 5700K (57K)			
		6 Watts (6W) 648 Lumens / ft <sup>1</sup>	DALI <sup>5</sup> (DALI) JA8 0-10V (JA8-10V)				
			Leave Blank for Non-Dimming	Red (R) Green (G) Blue (B) Amber (A)			

**Note:** Remote drivers wattage sized based on length of run. **Example:** 10' run x 3 watts per foot = 30 watts. Driver will be sized to 30 watts maximum.

- <sup>1</sup> Lumens per Foot based on 35K CCT LED. **Example:** 108 Lumens x 2 Watts = 216 Lumens per Foot.
- <sup>2</sup> (L3DA) 40 watt max Hi-Lume 1% L3DA3W #L3DA4UIUKL-CV240
- <sup>3</sup> (L3D0) 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U
- <sup>4</sup> Default DMX address of each fixture is 001. Consult third party DMX commissioner to modify at time of installation.
- <sup>5</sup> DALI commissioning to be performed by a third party at time of installation. ALUZ does not provide DALI commissioning.
- <sup>6</sup> Run lengths required for Wet Location and IP67 products. Provide run lengths at time of order.



## A2 Series | Recessed ZUVU Flush Wall (A2-ZUVU-FWL)

TYPE

### LAMP FEATURES

Lamp Type	LEDs (No Mercury)
CRI	> 90
Efficacy (Based on 35K CCT LED)	108 Lumens per Watt

### LAMP SPECIFICATIONS

Lamp Number	Correlated Color Temperature / Description	Efficacy (Lumens per Watt)	L70 LED Life
24K	2400 Kelvin (Incandescent White)	108	60,000 hrs.
27K	2700 Kelvin (Warm White)	108	
30K	3000 Kelvin (Warm White)	108	
35K	3500 Kelvin (Neutral White)	108	
40K	4000 Kelvin (Neutral White)	108	
45K	4500 Kelvin (Neutral White)	108	
50K	5000 Kelvin (Cool White)	108	40,000 hrs.
57K	5700 Kelvin (Cool White)	108	
R	Red (621nm)		
G	Green (525nm)		
B	Blue (470nm)		
A	Amber (590nm)		

To calculate Lumens per Foot, multiply Efficacy by Watts per Foot.  
**Example:** 108 Lumens per Watt x 2 Watts per Foot = 216 Lumens per Foot.

### MOUNTING OPTION



Mud-In

### LENS / OPTICS APPEARANCE




50% Semi-Frosted Lens (SF)  
Slight Diode Image  
12.5% Loss Factor




100% Frosted Lens (F)  
No Diode Image: Line of Light  
25% Loss Factor

### SPECTRAL POWER DISTRIBUTION AMBER LED (590nm) TURTLE FRIENDLY

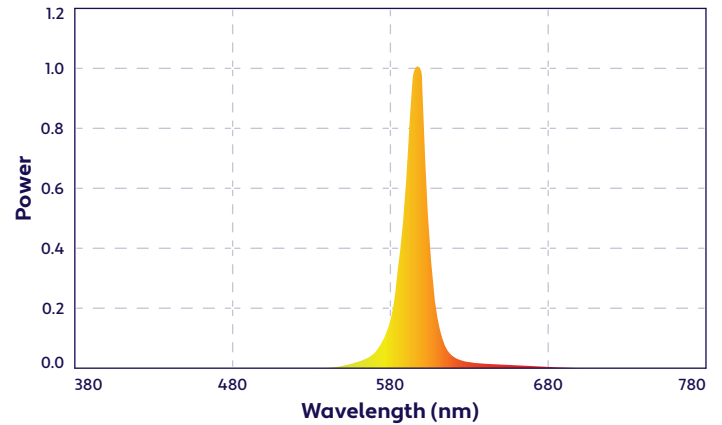

### BEAM ANGLE



### DRIVERS

Dimming Selection	Product Code	Link to Specification Sheet / URL
Phase Dimming: Forward Phase / Reverse Phase	(PH)	
0-10V: 100% - 1%	(10V)	
Hi-Lume 1% 3 Wire	(L3DA)	
Hi-Lume Premier 0.1% JA8	(L3D0)	
JA8 0-10V	(JA8-10V)	
DMX-512	(DMX)	
DALI	(DALI)	

1170 N Red Gum St, Anaheim, CA 92806

[aluz.lighting](http://aluz.lighting) [info@aluz.lighting](mailto:info@aluz.lighting) [866.ALUZ.LTG](tel:866.ALUZ.LTG) | 714.535.7900

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

Specification Submittal

Page 2 of 4

11 / 27 / 2023 / Rev 13

### END CAPS (Sold Separately)



Left End Cap  
(A2-ZUVU-FWL-ECL)

Part #	Qty.
A2-ZUVU-FWL-ECL	

**Note:** Use 1 Left End Cap for each termination on the left side.




Right End Cap  
(A2-ZUVU-FWL-ECR)

Part #	Qty.
A2-ZUVU-FWL-ECR	


**Note:** Use 1 Right End Cap for each termination on the left side.

### MITERED CORNERS (Sold Separately)



90° Internal Corner  
(A2-ZUVU-FWL-90D-IN)

Part #	Qty.
A2-ZUVU-FWL-90D-IN	




90° External Corner  
(A2-ZUVU-FWL-90D-EX)

Part #	Qty.
A2-ZUVU-FWL-90D-EX	

### DRY CONNECTORS (Sold Separately)


**Note:** Connector style subject to change without notice.  
Refer to cut sheet or installation instructions for wiring colors.

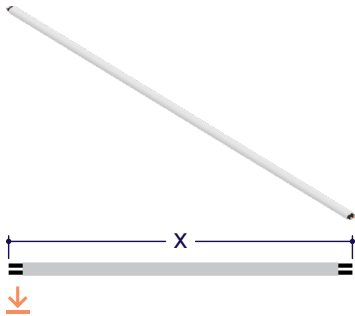


Part #	Length	Qty.
A2-PC-2P-PLM-DRY-	36"	
A2-PC-2P-PLM-DRY-		

### WET CONNECTORS (Sold Separately)


**Note:** Connector style subject to change without notice. Refer to cut sheet or installation instructions for wiring colors.

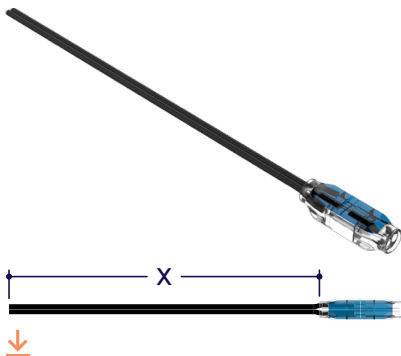

Part #	Length	Qty.
A2-PC-2P-WET-	36"	
A2-PC-2P-WET-		

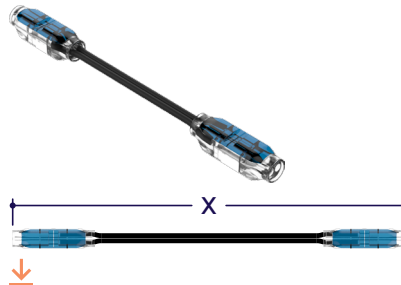


Part #	Length	Qty.
A2-CC-2P-WET-	3"	
A2-CC-2P-WET-		

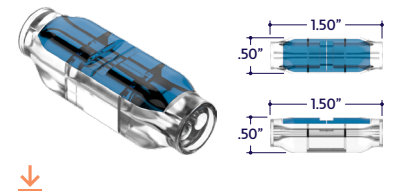


Part #	Qty.
A2-SC-2P-WET	

### DESIGN GUIDELINES


Individual Fixture

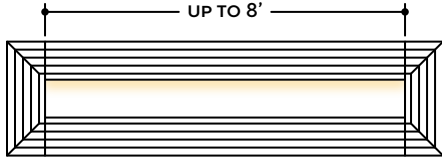


Individual Fixture with Mud-In

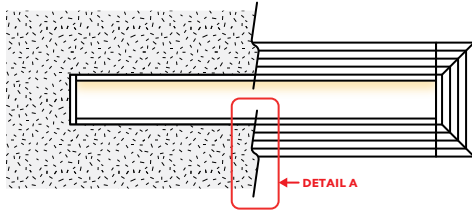


Continuous Run

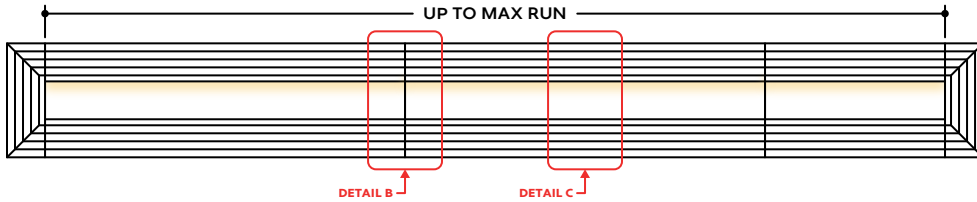

Runs with Continuous Connector (Dry Location)

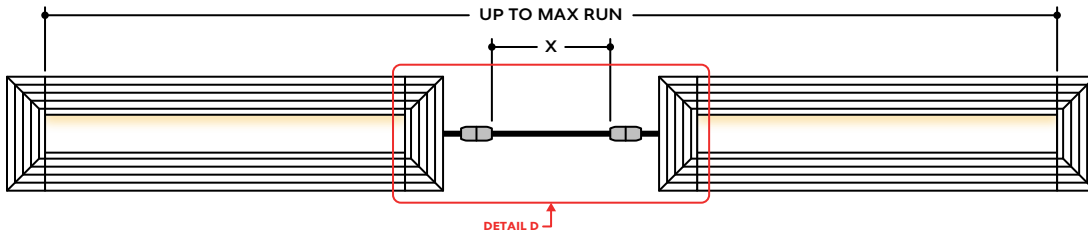

Runs with Continuous Connector (Wet Location)

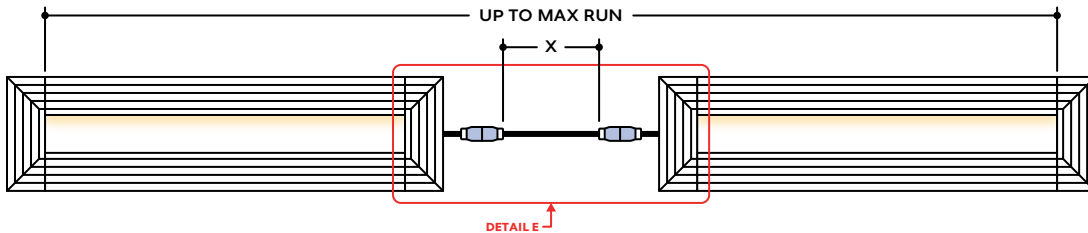

### KEY

- Detail A** **Mud-In:** Plaster is used to cover the flanges of the extrusion, leaving a flush appearance. Refer to installation instructions for details.
- Detail B** **Two Extrusions Meet:** Two extrusion segments meet. Refer to installation instructions for additional details.
- Detail C** **Two Lenses Meet:** Lenses are staggered so that the lens always overlaps where two extrusion segments meet. Refer to installation instructions for additional details.
- Detail D** **Dry Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a dry location installation area. For Mud-In applications, the connection is located behind the mounting surface, such as drywall.
- Detail E** **Wet Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a wet location installation area. For Mud-In applications, the connection is located behind the mounting surface.

**Note:** Drawings not to scale. Product may differ from examples shown.