



# ALUZ

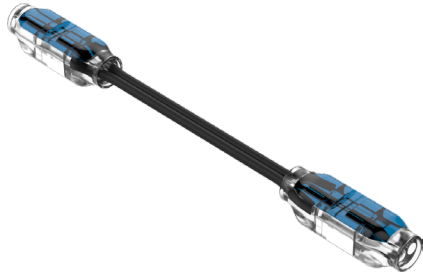


Wet Continuous Connector  
20/2 Gauge Wire  
(A7-CC-2P-WET-X)  
X = Specify Length, 36" Default


- Slide shrink tube over wires and connector.  
Part wires 3/4" for insertion into the wet splice connector.

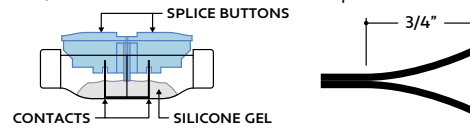

- Push wires into connector until they stop at the center point.  
Repeat process for the other side.  
**Note:** The positive wire (+) has a ribbed wire jacket, the negative wire (-) has a smooth wire jacket.

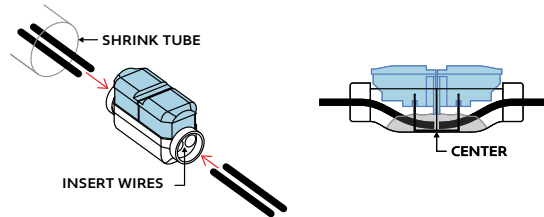


- Use pliers to push splice buttons down completely until they sever the wire and snap into place.

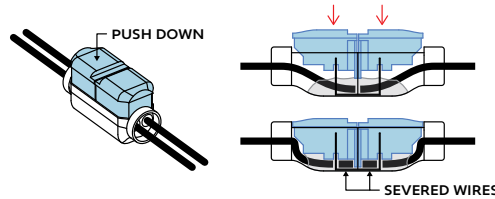

## A7 Series | Auditorium / Theater CONNECTOR Wet Continuous Connector (A7-CC-2P-WET)

- Slide shrink tube over connector and apply heat. The shrink tube will shrink down around the connector. Apply silicone around the ends to create a stronger seal.  
**Note:** Do not use an open flame such as a lighter or torch to heat shrink tube.

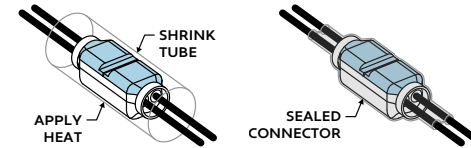

- Slide shrink tube over wires and connector.  
Part wires 3/4" for insertion into the wet splice connector.

