




### END VIEWS / DIMENSIONS



### BEAM ANGLE



### LAMP SPECIFICATIONS

Lamp Number	Description	L70 LED Life
RGBW	Color Changing: Red, Green, Blue, 3000K White	50,000 hrs.
RGBCW	Color Changing: Red, Green, Blue, 6000K Cool White	

### GENERAL FEATURES

Applications	Accent, Decorative, Surface, Recessed, Pendant Lighting
Viewing Angle	120°
Length	Built to Order (+/- 1/8" Tolerance)
Construction	Flexible LED Tape
Assembly Increment	4"
Field Cutting	Dry and Wet Location Field Cuttable
Weight	0.016 lbs per foot
Mounting	Mounting Channel or Mounting Clips (Sold Separately)
Listing	Dry or Wet (IP67) Location UL2108, 67.1.9, 60.4, CSA C22.2 #9 UL8750, CSA250
Driver	Remote (Sold Separately)
Closet Rating	Up to 4.5 Watts per Foot Maximum
Temperature Ratings	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
Installation Link	

### ELECTRICAL

Dimming	DMX
Maximum Run (Class 1 Applications)	21' (5.5W) 26' (4.5W)
Maximum Run (Class 2 Applications)	15' (5.5W) 18' (4.5W)
Luminaire Voltage	24VDC

### LAMP FEATURES

Lamp Type	Color Changing LEDs: Red, Green, Blue, White
Efficacy (Based on White Only @ 100% Output)	75 Lumens per Watt

### SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS


Series	Watts per Foot	Dimming	LED	Listing	Luminaire Length
<b>A8-ZIZA-TAPE</b>					
ZIZA Tape (A8-ZIZA-TAPE)	4.5 Watts (4.5W) 337 Lumens / ft	DMX-512* (DMX)	Red, Green, Blue, 3000K White* (RGBW)	Indoor (DRY) Outdoor* (WET)	Specify Length in Feet & Inches Example: 7'8"
	5.5 Watts (5.5W) 412 Lumens / ft		Red, Green, Blue, 6000K White (RGBCW)	Outdoor IP67* IP67)	

- \*1 Default DMX address of each luminaire is 001. Consult third party DMX commissioner to modify at time of installation.
- \*2 Default LED is RGBW if left blank.
- \*3 Run lengths are required for Wet & IP67 Location products. Provide run lengths at time of order.

### DRIVERS


Dimming Selection	Product Code	Link to Specification Sheet / URL
DMX-512	(DMX)	

### MOUNTING OPTIONS (Sold Separately)

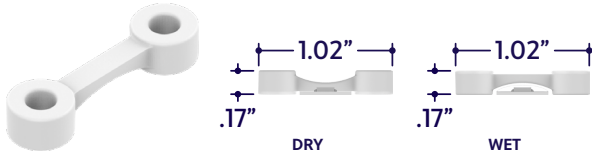


Part #	Qty.
A8-ZIZA-TAPE-MCS	

**Note:** Use 1 mounting clip per 6", rounded up. Click on image to see cut sheet for additional details.

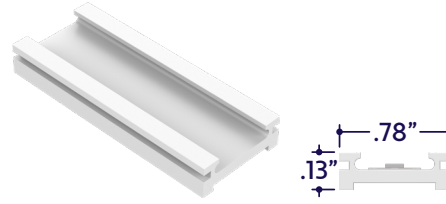

Part #	Qty.
A8-ZIZA-TAPE-UC-8'	

**Note:** Order Mounting Channel as needed in 8', field cuttable lengths. Click on image to see cut sheet for additional details.



Part #	Qty.
A8-ZIZA-TAPE-UC-CP	

**Note:** Use 1 channel clip per 6", rounded up. Click on image to see cut sheet for additional details.

### DMX ACCESSORIES (Sold Separately)




Part #	Qty.
DRV100-E-UNV-24VDC-DMX-DRY-RGBW	

**Note:** Use 1 Driver for each run up to 100 Watts. Click on image to see Specification Submittal.



Part #	Qty.
CTRL-DMX-RGBX	

**Note:** Use 1 Decoder for each run up to 180 Watts. Not required if using DRV100-E.



Part #	Qty.
CTRL-DMX-128C	

**Note:** Controls up to 128 DMX Channels, or up to 32 RGBW light fixtures.



Part #	Qty.
CTRL-DMX-1024C	

**Note:** Controls up to 1024 DMX Channels, or up to 256 RGBW light fixtures.

### DRY CONNECTORS (Sold Separately)

**Note:** Connectors are factory assembled to each run length. Connectors are subject to change without notice.



Dry Power Connector  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-PC-DRY-X)**  
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIZA-TAPE-PC-DRY-	36"	
A8-ZIZA-TAPE-PC-DRY-		

**Note:** Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.



Dry Power Connector with Black Jacket  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-PC-DRY-BK-X)**  
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIZA-TAPE-PC-DRY-BK-	36"	
A8-ZIZA-TAPE-PC-DRY-BK-		


**Note:** Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.



Dry Power Connector with White Jacket  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-PC-DRY-WH-X)**  
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIZA-TAPE-PC-DRY-WH-	36"	
A8-ZIZA-TAPE-PC-DRY-WH-		

**Note:** Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

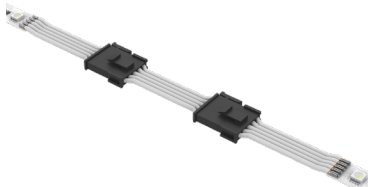

Dry Continuous Connector  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-CC-DRY-X)**  
X = Specify Length, 3" Default

Part #	Length	Qty.
A8-ZIZA-TAPE-CC-DRY-	3"	
A8-ZIZA-TAPE-CC-DRY-		

**Note:** Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.



Dry Continuous Connector with Black Jacket  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-CC-DRY-BK-X)**  
X = Specify Length, 3" Default

Part #	Length	Qty.
A8-ZIZA-TAPE-CC-DRY-BK-	3"	
A8-ZIZA-TAPE-CC-DRY-BK-		

**Note:** Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.




Dry Continuous Connector with White Jacket  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-CC-DRY-WH-X)**  
X = Specify Length, 3" Default

Part #	Length	Qty.
A8-ZIZA-TAPE-CC-DRY-WH-	3"	
A8-ZIZA-TAPE-CC-DRY-WH-		

**Note:** Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

### WET CONNECTORS (Sold Separately)

**Note:** Connectors are factory assembled to each run length. Connectors are subject to change without notice.

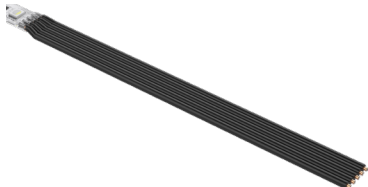

Wet Power Connector  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-PC-WET-X)**  
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIZA-TAPE-PC-WET-	36"	
A8-ZIZA-TAPE-PC-WET-		

**Note:** Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.




Wet Continuous Connector  
(20/5 Gauge Wire)  
**(A8-ZIZA-TAPE-CC-WET-X)**  
X = Specify Length, 3" Default


Part #	Length	Qty.
A8-ZIZA-TAPE-CC-WET-	3"	
A8-ZIZA-TAPE-CC-WET-		

**Note:** Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.


### SURFACE MOUNT CHANNELS




<b>Material</b>	Flexible Tape
<b>Lens</b>	Clear




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Polycarbonate
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Flexible Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted 15°, 30°, 45°, 60° Optics Asymmetric Optics




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted 15°, 30°, 45°, 60° Optics Asymmetric Optics




<b>Material</b>	Aluminum
<b>Lens</b>	100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted



<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted


### CORNER MOUNT CHANNELS



<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted


### RECESSED MOUNT CHANNELS




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted



<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted 15°, 30°, 45°, 60° Optics Asymmetric Optics

### GLASS MOUNT CHANNELS




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted

### INGRADE CHANNELS




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted


### FLUSH / MUD-IN CHANNELS




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted



<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	50% Semi-Frosted 100% Frosted




<b>Material</b>	Aluminum
<b>Lens</b>	Clear 50% Semi-Frosted 100% Frosted

## DESIGN GUIDELINES


### Individual Run (Dry Location)

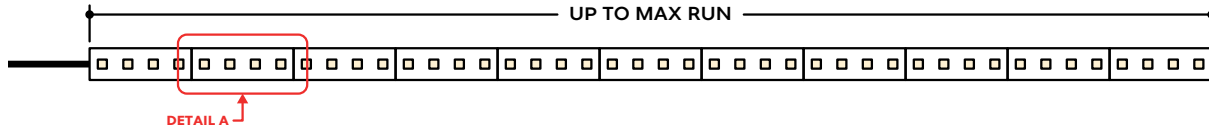


### Individual Run (Wet Location)

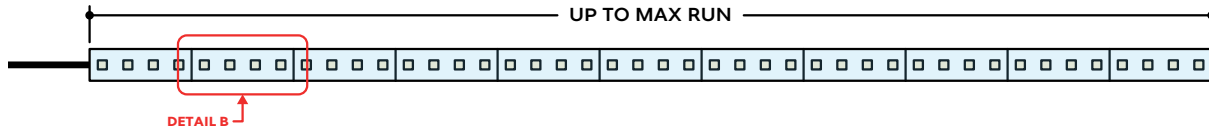

### Run with Continuous Connector (Dry Location)

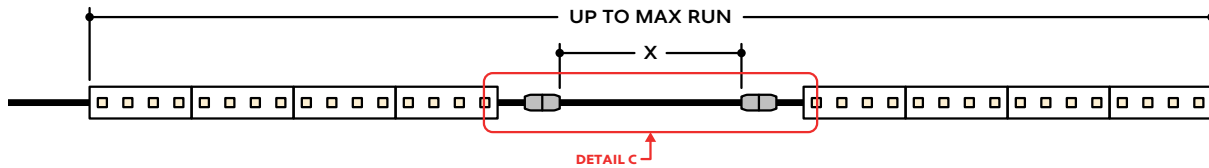

### Run with Continuous Connector (Wet Location)

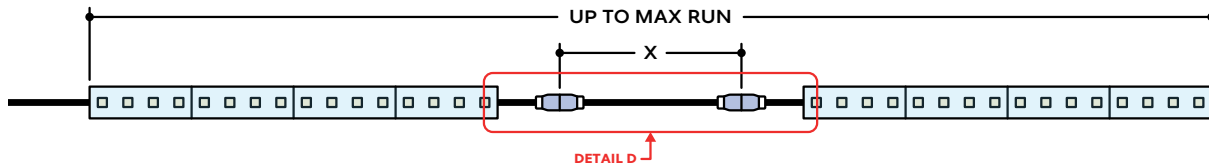

## KEY

- Detail A Dry Rated Tape:** The LED tape is rated for indoor (Dry Location) applications only.
- Detail B Encapsulated Wet Rated Tape:** The LED tape is encapsulated in silicone and rated for outdoor (Wet Location) applications.
- Detail C Dry Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a dry location installation area.
- Detail D Wet Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a wet location installation area.

**Note:** Drawings not to scale. Product may differ from examples shown.

## CONNECTION SEQUENCE




- Specifying a layout is not required to place an order.
- Configuration code applies to full length ordered and will be built per the Continuous Run models on Design Guidelines.
- Connector type subject to change based on availability and listing. Refer to Design Guidelines for details.

## HOW TO SPECIFY CONFIGURATIONS


### Example: 20' Straight Run

- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-DRY-NA-20'-PC-EC




### Example: 25' L-Shaped Run

- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-12'-PC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-6'-CC-EC

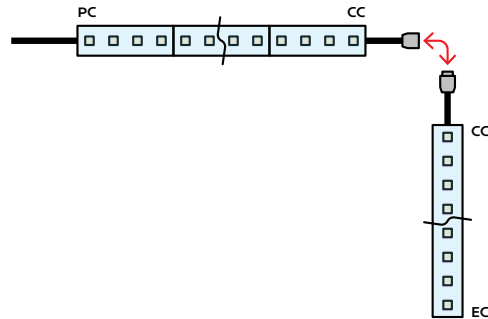

### Example: 30' U-Shaped Run

- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-DRY-NA-6'-PC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-DRY-NA-18'-CC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-DRY-NA-6'-CC-EC

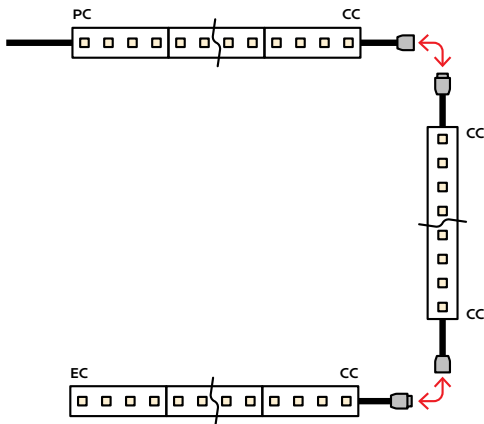

### Example: 28' Rectangle Shaped Run

- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-11'-PC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-3'-CC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-11'-CC-CC
- 1x A8-ZIZA-TAPE-4.5W-DMX-RGBW-WET-NA-3'-CC-EC

