



END VIEW / DIMENSIONS



MOUNTING OPTION



Pendant Mount

GENERAL FEATURES

Applications	Pendant Lighting for Closet Rod Applications
Viewing Angle	120°
Length	Built to Order (+/- 1/8" Tolerance)
Construction	Flexible LED Tape
Field Cutting	Dry and Wet Location Field Cuttable
Weight	0.016 lbs per foot
Mounting	Mounting Channel or Mounting Clips (Sold Separately)
Listing	Dry, Wet, or IP67 Location UL2108, 67.1.9, 60.4, CSA C22.2 #9 UL8750, CSA250
Driver	Remote (Sold Separately)
Closet Rating	Up to 3.6 Watts per Foot Maximum
Weight Rating	Hang up to 10 lbs per foot
Temperature Ratings	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
Installation Link	

ELECTRICAL

Dimming	DMX, DALI
Maximum Run (Class 1 Applications)	26' (4.5W) 33' (3.6W)
Maximum Run (Class 2 Applications)	18' (4.5W) 23' (3.6W)
Luminaire Voltage	24VDC

SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS

Series	Lens	Watts per Foot	Dimming	LED	Listing	Finish	Luminaire Length
A8-ZUDA-ROD							
DWH							
ZUDA Rod (A8-ZUDA-ROD)	Clear Lens (CL)	3.6 Watts (3.6W)	DMX-512 ^{#1} (DMX)	2400K - 6400K (DWH)	Indoor (DRY)	Natural Silver ^{NA} (NA)	Specify Length in Feet & Inches Example: 7'8"
	50% Semi-Frosted Lens (SF)	4.5 Watts (4.5W)	DALI ^{#2} (DALI)		Outdoor ^{#3} (WET)	Polished (PA) (PA) White (WH) (WH)	
	100% Frosted Lens (F)				Outdoor IP67 ^{#3} (IP67)	Satin / Silver (SA) (SA) Black (BK) (BK)	

^{#1} Default DMX address of each luminaire is 001. Consult third party DMX commissioner to modify at time of installation.
^{#2} DALI commissioning to be performed by a third party at time of installation. ALUZ does not provide DALI commissioning.
^{#3} Run lengths are required for Wet & IP67 Location products. Provide run lengths at time of order.
^{#4} Default finish is Natural Silver (NA) if left blank.




LAMP FEATURES

Lamp Type	Dynamic White LEDs: 2400K - 6400K
CRI	> 90
Efficacy*	117 Lumens per Watt @ Lowest CCT (24K) 129 Lumens per Watt @ Highest CCT (64K)

Note: Efficacy is based on 24K CCT LED (**24K**) with Clear Lens (**CL**).

BEAM ANGLE




120° x 120° Beam

DRIVERS

Dimming Selection	Product Code	Link to Specification Sheet / URL
DMX-512	(DMX)	
DALI	(DALI)	

MOUNTING ACCESSORIES (Sold Separately)

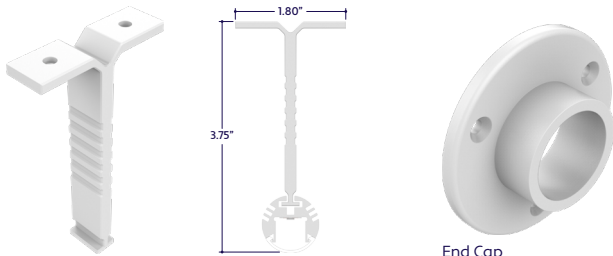

Part #	Finish	Qty.
A8-ZUDA-ROD-MB-		

Note: Use 1 mounting bracket per 2', rounded up. Default Finish is Natural Silver (**NA**) if unspecified.

End Cap
(A8-ZUDA-ROD-EC-X)
X = Specify Finish:
(NA), (PA), (WH), (SA), or (BK)

Part #	Finish	Qty.
A8-ZUDA-ROD-EC-		

Note: Use 1 End Cap for each termination. Default Finish is Natural Silver (**NA**) if unspecified.

LAMP SPECIFICATIONS

Lamp Number	Correlated Color Temperature (CCT) Gamut	L70 LED Life
DWH	Dynamic White: 2400K - 6400K	50,000 hrs.

LENS / OPTICS APPEARANCE



Clear Lens (**CL**)
Visible Diode Image
0% Light Loss



50% Semi-Frosted Lens (**SF**)
Slight Diode Image
12.5% Light Loss



100% Frosted Lens (**F**)
No Diode Image: Line of Light
25% Light Loss

DMX ACCESSORIES (Sold Separately)



Part #	Qty.
DRV100-E-UNV-24VDC-DMX-DRY-DWH	
DRV100-E-UNV-24VDC-DALI-DRY-DWH	

Note: Use 1 Driver for each run up to 100 Watts. Click on image to see Specification Submittal.



Part #	Qty.
CTRL-DMX-RGBX	

Note: Use 1 Decoder for each run up to 180 Watts. Not required if using DRV100-E.



Part #	Qty.
CTRL-DMX-128C	

Note: Controls up to 128 DMX Channels, or up to 32 RGBW light fixtures.



Part #	Qty.
CTRL-DMX-1024C	

Note: Controls up to 1024 DMX Channels, or up to 256 RGBW light fixtures.

DRY CONNECTORS (Sold Separately)

Note: Connectors are factory assembled to each run length. Connectors are subject to change without notice.



Dry Power Connector
(20/3 Gauge Wire)
(A8-ZUDA-ROD-PC-DRY-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZUDA-ROD-PC-DRY-	36"	
A8-ZUDA-ROD-PC-DRY-		


Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.



Dry Power Connector with Black Jacket
(20/3 Gauge Wire)
(A8-ZUDA-ROD-PC-DRY-BK-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZUDA-ROD-PC-DRY-BK-	36"	
A8-ZUDA-ROD-PC-DRY-BK-		

Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

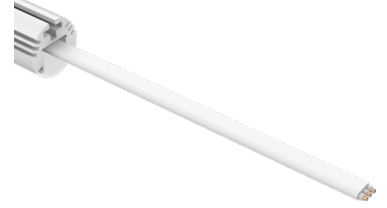

Dry Power Connector with White Jacket
(20/3 Gauge Wire)
(A8-ZUDA-ROD-PC-DRY-WH-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZUDA-ROD-PC-DRY-WH-	36"	
A8-ZUDA-ROD-PC-DRY-WH-		

Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

WET CONNECTORS (Sold Separately)

Note: Connectors are factory assembled to each run length. Connectors are subject to change without notice.




Wet Power Connector
(20/3 Gauge Wire)
(A8-ZUDA-ROD-PC-WET-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZUDA-ROD-PC-WET-	36"	
A8-ZUDA-ROD-PC-WET-		


Note: Specify 1 Power Connector for each lead required.
Power Connectors are factory assembled to each length.

DESIGN GUIDELINES

Individual Fixture

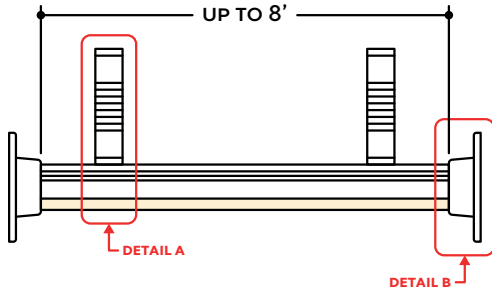

Continuous Run (Dry or Wet Location)

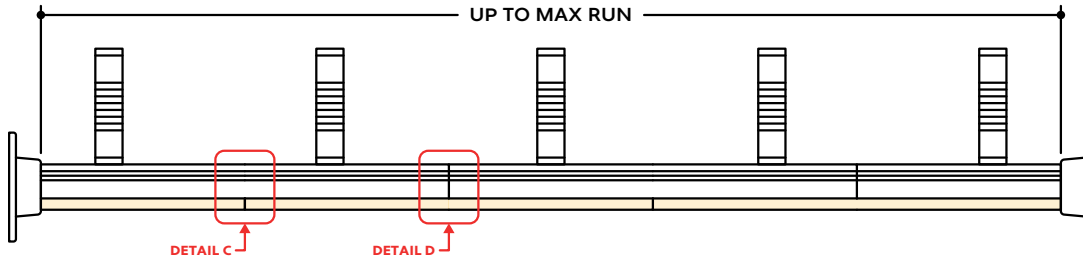

KEY

- Detail A Mounting Bracket:** Mounting Brackets are used to suspend the closet rod extrusion in place and provide support for the weight of hunged items.
- Detail B End Cap:** End Caps support the run at each end and provide an entrance for power leads.
- Detail C Two Lenses Meet:** Lenses are staggered so that the lens always overlaps where two extrusion segments meet. Refer to installation instructions for additional details.
- Detail D Two Extrusions Meet:** Two extrusion segments meet. Refer to installation instructions for additional details.

Note: Drawings not to scale. Product may differ from examples shown.